


PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5 A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE 500V AC (CONT / CONT)
OPERATING TEMPERATURE -55°C TO 125°C
CONTACT RESISTANCE 20 MΩ MAX
INSERTION FORCE :0.75 N MAX /CONT
EXTRACTION FORCE: 0.15 N MIN /CONT
INSULATION RESISTANCE :10⁴ MΩ MIN

NOTES

- LEAD FREE INDICATOR : LF- LEAD FREE
- PERFORMANCE LEVEL INDICATOR (REF DWG No. BS,C,201844,003)
- THIS PRODUCT IS CSA APPROVED
THIS PRODUCT IS UL RECOGNISED
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING: BSA,201,572001
- THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVE AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

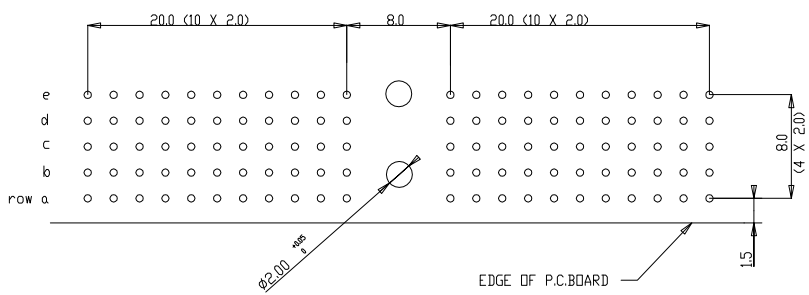

Material		Spec ref		tolerance	projection	MM
Mat code		✓		±0.05	±0.10	±0.15
Heat treat						
Plating/Finish						
Dr	4	2	92	J.V.B	size	Scale
Eng					A1	5.000
Chr					Product Family	MILLIPACS
Appr					Model Name	HMER01PA5100----
					Model Revision	ECN
						REL Level
FCI		MPACS 5+2R RA RCP		size		BS,C,201418,001
REV		CONN TYPE A		Scale		5.000
DATE		CUSTOMER DRAWING		Rev.		E

All rights reserved. Reproduction or use in any part is prohibited without written consent from the proprietor.
 Property of FCI, Copyright 1992.

All other dimensions conform to standards of MIL-STD-883C, Method 2000, Class B, unless otherwise specified.
 Property of FCI, Copyright 1992.